

Camera कोई भी
Cable & Connector सिर्फ एक
Becoz Security Matters.....

SECURE©NET[®]
.....Security Matters



- CAT6 CABLE
- 2+1 CCTV CABLE
- 3+1 CCTV CABLE
- EPABX
- INTERCOM

- POWER ADAPTER
- POWER SUPPLY
- RACKS
- ACCESSORIES

- RAM
- SSD
- SSD NVMe
- TELECOM CABLE
- TONER

2+1 CCTV CABLES

FOR BUILT IN MIC CAMERA

NEW GENERATION CABLE FOR NEW GENERATION CAMERA

SECURE@NET
.....Security Matters



S-320

VIDEO CORE CONDUCTOR: .021 INCH / .520 MM SOLID COPPER
POWER CORE CONDUCTOR: 42 SWG (0.100 MM)
NUMBER OF STRANDS: 14 MULTISTRAND COPPER
BRAIDING CONDUCTOR: 48-WIRE HIGH-GRADE ALLOY
65% COVERAGE ON VIDEO
CABLE LENGTH: 90 YARDS

USP

INDIA'S 1ST 2+1 CCTV CABLE
ECO PREMIUM IDEAL FOR SHORT DISTANCE
BEST UP TO 180 YARDS
CAMERA SUPPORT UPTO 4.0 MP



S-520 PRO

2+1 CCTV CABLE (HIGHLIGHT PROFESSIONAL SERIES)
VIDEO CORE CONDUCTOR: .021 INCH / .520MM SOLID COPPER
POWER CORE CONDUCTOR: 42 SWG (0.100 MM)
NUMBER OF STRANDS: 14 MULTI-STRAND COPPER
BRAIDING CONDUCTOR: 36-WIRE COPPER
75% COVERAGE ON VIDEO

USP

INDIA'S ONLY 100 % COPPER 2+1 CABLE,
INDIA'S ONLY THIN & LIGHTWEIGHT CCTV CABLE
PREMIUM CABLE IDEAL FOR MID-RANGE INSTALLATION
BEST RESULT UP TO 180 METER
SUPPORT CAMERA UP TO 5 MP
INDIA'S ONLY FRLS (FIRE RETARDANT LOW SMOKE CCTV CABLE)
BEST IN CLASS BRAIDING COVERAGE
CRYSTAL CLEAR DISPLAY



S-3220 HD PLUS

2+1 DOUBLE JACKET HD CCTV CABLE (OUTDOOR)
VIDEO CORE CONDUCTOR: .028 INCH / .071 MM
POWER CORE CONDUCTOR: 14 STRANDS OF .15 MM / 38 SWG
BRAIDING: 48 STRANDS OF .91 MM MULTISTRAND COPPER
INNER JACKET: PVC INSULATED
OUTER JACKET: HDPE SEATH
CABLE LENGTH: 200 METER
PACKING: WOODEN REEL

USP

INDIA'S ONLY DOUBLE JACKET OUTDOOR CCTV HD CABLE
LONG-DISTANCE OUTDOOR HD CAMERA CABLE
REAL DUBBLE JACKET REAL OUTDOOR
100% COPPER
80% BRADING COVERAGE
SUPPORT UPTO 8 MP HD CAMERA
SUPPORT DISTANCE UP TO 400 M



S-4000 HD PLUS

CABLE TYPE: RG 59+2
VIDEO CORE CONDUCTOR: JELLY-FILLED PVC INSULATED SOLID COPPER
GAUGE: .032" / .810MM (RG 59)
POWER CORE CONDUCTOR: 14 STRANDS OF 38 SWG (.15 MM)
BRAIDING CONDUCTOR: 40 SWG HIGH-GRADE ALLOY
NO. OF BRAIDING STRANDS: 48
COLOUR: PEARL WHITE
CABLE LENGTH: 90 METERS
PACKING: COILS

USP

BEST LONG DISTANCE INDOOR CABLE
SUPPORT UP TO 300 M
SUPPORT UPTO 8MP
HIGH STRENGTH PVC
BRAIDING COVERAGE 70%

LIFT CCTV CABLE



S-6000 L CAT 6

8 CORE OF 7 STRANDS OF .193 MM / 23 AWG PE INSULATION
UTP
OUTER SHEATH: RUBBERISED POLY VINYL INSULATION (RPVCL)
PACKING: 100 M COIL

USP

UPTO 1 LAC TIME UP-DOWN
SUPPORT ALL TYPES OF IP CAMERA
MULTI-STRAND WIRES FOR LONG-LASTING FLEXIBILITY



S-7000 L 2+2

VIDEO CORE CONDUCTOR: PE INSULATED 7 STRANDS OF .152 MM
POWER CORE: PVC INSULATED 16 STRANDS OF .19 MM MULTISTRAND COPPER WIRE
BRAIDING: 48 STRANDS OF .91 MM PVC INSULATED
POWER CORE: 16 STRANDS OF .19 MM PVC INSULATED
OUTER SHEATH: RUBBERISED POLY VINYL CHLORIDE INSULATION (RPVCI)
PACKING: 100 M COIL

USP

BEST COVERAGE UPTO 70%
100% BARE COPPER
MULTI-STRAND WIRES FOR BETTER FLEXIBILITY
LONG-LASTING
SUPPORT UP TO 300 METERS IN LENGTH
SUPPORT UP TO 8 MP HD CAMERA



Making in India... ही नहीं... Making India Too

3+1 CCTV CABLES

FOR HD CAMERA

SECURENET
.....Security Matters



S-500

PRODUCT: 3+1 CCTV CABLE
VIDEO CORE CONDUCTOR: .020" / .510 MM
POWER CORE CONDUCTOR: 14 MULTISTRAND COPPER WIRE OF 42 SWG (.100MM)
AUDIO CORE CONDUCTOR: 14 MULTISTRAND COPPER WIRE OF 42 SWG (.100MM)
BRAIDING: 36 STRANDS HIGH-GRADE ALLOY
VIDEO CORE COVERAGE: 60%
CABLE LENGTH: 90 METER
PACKING: RETAIL BOX

USP

HIGH STRENGTH LOW WEIGHT FR PVC
BEST FOR HD CCTV CAMERAS UP TO 2.4 MP
BEST FOR DISTANCES UP TO 180 METERS



S-1000

PRODUCT: 3+1 CCTV CABLE
VIDEO CORE CONDUCTOR: .022 INCH / .520MM/26 SWG
POWER CORE CONDUCTOR: 14 MULTISTRAND COPPER WIRE OF 42 SWG (.100MM)
AUDIO CORE CONDUCTOR: 14 MULTISTRAND COPPER WIRE OF 42 SWG (.100MM)
BRAIDING: 48 STRANDS HIGH-GRADE ALLOY
VIDEO CORE COVERAGE: 65%
CABLE LENGTH: 90 METER
PACKING: RETAIL PACK

USP

HIGH STRENGTH LOW WEIGHT FR PVC
BEST FOR CAMERAS UPTO 4.0 MP
BEST FOR DISTANCES UP TO 180



S-1100 PRO PROFESSIONAL SERIES HYBRID CCTV CABLE

VIDEO CORE CONDUCTOR: .021INCH/.520 MM
POWER CORE CONDUCTOR: 14 MULTI-STRAND COPPER WIRE OF 42 SWG (.100MM)
AUDIO CORE CONDUCTOR: 14 MULTI-STRAND COPPER WIRE OF 42 SWG (.100MM)
BRAIDING: 48 STRANDS HIGH-GRADE ALLOY
VIDEO CORE COVERAGE: 65%
CABLE LENGTH: 90 M RETAIL PACK

USP

SINGLE JACKET OUTDOOR HD CCTV CABLE
INDIA'S ONLY HYBRID HD CCTV CABLE
100% COPPER VIDEO & POWER
HIGH-GRADE ALLOY BRAIDING TO RESTRICT VIDEO DISTORTION
IDEAL FOR INDORE & OUTDOOR INSTALLATION
BEST RESULT UP TO 180 M
SUPPORT CAMERA UP TO 5 MP
FIRE RETARDANT
BEST IN-CLASS BRAIDING COVERAGE
ALL WEATHER SEAMLESS WORKING
HIGH STRENGTH LDPE FOR LONG-LASTING DURABILITY



S-2000

PRODUCT: 3+1 CCTV CABLE
VIDEO CORE CONDUCTOR: .022INCH / .550MM
POWER CORE CONDUCTOR: 14 MULTI-STRAND COPPER WIRE OF 42 SWG (.100MM)
AUDIO CORE CONDUCTOR: 14 MULTI-STRAND COPPER WIRE OF 42 SWG (.100MM)
BRAIDING: 36 STRANDS COPPER
VIDEO CORE COVERAGE: 60%
CABLE LENGTH: 90 & 180 METER
PACKING: RETAIL PACK

USP

INDIA'S FAVOURITE 100% COPPER CCTV CABLE
HIGH STRENGTH LOW WEIGHT FR PVC
BEST FOR CAMERA UPTO 5 MP
BEST FOR DISTANCE UP TO 180 M



S-2000 HD READY

VIDEO CORE CONDUCTOR: .024 INCH / .610MM
POWER CORE CONDUCTOR: 14 MULTI-STRAND TINNED COPPER WIRE OF 41 SWG (.110MM)
AUDIO CORE CONDUCTOR: 14 MULTI-STRAND COPPER WIRE OF 41 SWG (.110MM)
BRAIDING: 48 STRANDS OF COPPER
VIDEO CORE COVERAGE: 75 %
CABLE LENGTH: 90 & 180 METER
PACKING: RETAIL PACK

USP

SPECIALLY DESIGNED FOR HD CAMERAS
HIGH STRENGTH LOW WEIGHT FR PVC
BEST FOR CAMERA UPTO 8 MP
BEST FOR DISTANCE UP TO 180 M



S-2000 FHDFR

VIDEO CORE CONDUCTOR: .024 INCH / .610MM TINNED COPPER
POWER CORE CONDUCTOR: 14 MULTI-STRAND TINNED COPPER WIRE OF 41 SWG (.110MM)
AUDIO CORE CONDUCTOR: 14 MULTI-STRAND TINNED COPPER WIRE OF 41 SWG
BRAIDING: 48 STRANDS TINNED COPPER
VIDEO CORE COVERAGE: 85%
CABLE LENGTH: 90 METER & 180 METER
PACKING: RETAIL PACK

USP

INDIA'S ONLY 100% TINNED, 100% FR HD CCTV CABLE
HIGH STRENGTH LOW WEIGHT FIRE RETARDANT PVC
UP TO 80 DEGREE TEMP
BEST FOR CAMERAS UP TO 8 MP
BEST FOR DISTANCES UP TO 300 M
LONG LIFE
ZERO DISTORTION

Making in India... ही नहीं... Making India Too

CAT6 CABLE

FOR NETWORK AND IP CCTV CAMERA

SECURENET
.....Security Matters



CAT 6 UTP 100 M (24 AWG)

PRODUCT: UNSHIELDED TWISTED PAIR (UTP) CAT 6 CABLE
CONDUCTOR: 24 AWG (.51-.53 MM) COPPER
PAIRING: 2 HDPE INSULATED CONDUCTOR TWISTED TOGETHER
NO. OF PAIRS: 4 PAIRS WITH PE CROSS SEPARATOR
JACKET: FR PVC
DIAMETER: 5.8 MM
COLOR: GREY
LENGTH: 100 METERS
PACKING: TANGEL FREE BOX

USP

IDEAL FOR IP CAMERA INSTALLATION
IDEAL FOR LONG-DISTANCE USAGE AS PER STANDARD CAT 6 FEATURES.
SPECIALLY DESIGNED FOR VIDEO SIGNAL/ IP CAMERA.



CAT 6 UTP (24 AWG)

PRODUCT: UNSHIELDED TWISTED PAIR (UTP) CAT 6 CABLE
CONDUCTOR: 24 AWG (.51-.53 MM) COPPER
PAIRING: 2 HDPE INSULATED CONDUCTOR TWISTED TOGETHER
NO. OF PAIRS: 4 PAIRS WITH PE CROSS SEPARATOR
JACKET: FR PVC
DIAMETER: 5.8 MM
COLOR: GREY
LENGTH: 305 METER
PACKING: TANGEL FREE BOX

USP

IDEAL FOR IP CAMERA INSTALLATION
IDEAL FOR LONG-DISTANCE USAGE AS PER STANDARD CAT 6 FEATURES.
SPECIALLY DESIGNED FOR VIDEO SIGNAL/ IP CAMERA.



CAT 6 UTP (23 AWG)

PRODUCT: UNSHIELDED TWISTED PAIR (UTP) CAT 6 CABLE
CONDUCTOR: 23 AWG (.55-.57 MM) COPPER
PAIRING: 2 HDPE INSULATED CONDUCTORS TWISTED TOGETHER
NO OF PAIR: 4 PAIR TWISTED TOGETHER WITH PE CROSS SEPARATOR.
JACKET: FR PVC
DIAMETER: 6.1 MM
COLOR: GREY
LENGTH: 305 METERS
PACKING: TANGEL FREE BOX

USP

IDEAL FOR LARGE DATA /VIDEO SIGNAL
TRANSFER ON HIGH SPEED.
WORKING UP TO 650 MHZ



CAT 6 UTP DOUBLE JACKET (OUTDOOR)

PRODUCT: UNSHIELDED TWISTED PAIR DOUBLE JACKET CAT 6 CABLE
CONDUCTOR: 23 AWG (.55-.57 MM) COPPER
PAIRING: 2 HDPE INSULATED CONDUCTOR TWISTED TOGETHER
NO. OF PAIRS: 4 PAIRS WITH PE CROSS SEPARATOR
INNER JACKET: FR PVC
OUTER JACKET: LDPE
DIAMETER: 7.1 MM
COLOR: BLACK
LENGTH: 305 METERS
PACKING: WOODEN REEL

USP

IDEAL FOR IP CAMERA INSTALLATION
IDEAL FOR LONG-DISTANCE USAGE AS PER STANDARD CAT 6 FEATURES.
IDEAL FOR ALL WEATHER CONDITIONS.
FIRE RETARDANT INNER AND OUTER JACKET AGAINST FIRE SAFETY.

COMMON FEATURES

- 100% (ABC) BARE ANNEALED COPPER
- STRAIN RELIEF/FLUKE TESTED UL/TIA CERTIFIED PURE COPPER
- SUPPORTS GIGABIT ETHERNET (1000 BASE T) STANDARD.
- OPERATES AT 250 MHZ: 600 MHZ MODEL WISE
- CAT 6 CABLE ARE COMPLIANT WITH TIA/EIA-568-C.2
- RIP CORD IN EVERY MODEL TO GIVE EXTRA STRENGTH FOR INSTALLATION
- FR PVC

NOTE

- LSZH CABLES ARE AVAILABLE B2B

Making in India... ही नहीं... Making India Too

CAT6 CABLE

FOR NETWORK AND IP CCTV CAMERA



CAT 6 UTP ARMoured

PRODUCT: UNSHIELDED TWISTED PAIR (UTP)
CAT 6 ALUMINIUM ARMoured LAN / IP CAMERA CABLE
CONDUCTOR: 23 AWG (.55-.57 MM) COPPER
PAIRING: 2 HDPE INSULATED CONDUCTORS TWISTED TOGETHER.
NO OF PAIR: 4 PAIR TWISTED TOGETHER WITH CROSS SEPARATOR
INNER JACKET: PVC - GREY
ARMOURING: 0.8 MM ALUMINUM WIRE
OUTER JACKET: FR PVC
DIAMETER: 9.50 MM
CABLE COLOR BLACK
PACKING 305 MTRS WOODEN REEL

USP

IDEAL FOR HIGH-SPEED DATA & VIDEO SIGNAL TRANSFER FOR LAN & IP CAMERA

ARMoured CABLES ARE RECOMMENDED FOR THE PHYSICAL SAFETY OF CABLE AND CAN BE USED UNDERWATER, UNDERGROUND AND IN TOUGH WEATHER CONDITIONS FOR OPEN WIRING INSTALLATION.



CAT 6 SFTP

PRODUCT: SHIELDED TWISTED PAIR (SFTP) CABLE
CONDUCTOR: 23 AWG (.55-.57 MM) COPPER
PAIRING: 2 INSULATED CONDUCTORS TWISTED TOGETHER.
SHIELD: ALUMINUM / POLYESTER FOIL TAPE
BRAIDING: TINNED COPPER
OUTER JACKET: FR PVC /LSZH COMPLIANCE
DIAMETER: 7.6 MM
CABLE COLOR: GREY

USP

SFTP CAT 6 CABLES ARE IDEAL FOR HIGH-SPEED DATA TRANSFER.

DIGITAL AND ANALOGUE VOICE AND VIDEO SIGNALS TRANSFER ON LAN AND IP CAMERAS. TINNED COPPER BRAIDING GIVES PROTECTION AGAINST ELECTROMAGNETIC INTERFERENCE (EMI). AVOIDS SIGNAL LOSS AND PROTECTS FROM OUTER SIGNAL AFFECT.


SFTP CABLES ARE RECOMMENDED FOR CRITICAL DATA/VIDEO SIGNAL PROTECTION.

BNC & DC



BNC SCREW

GOOD CONTRACTION
FLEXIBLE & DURABLE
THICK AND WELL STRUCTURE
EASY INSTALLATION




BNC CAP

MODEL: BNC CAP



BNC WIRE PREMIUM

100% BRASS
14/38 100% COPPER CABLE
PIN SILVER COATED
FIRE RETARDANT PVC
PACK OF 16 / 8 AVAILABLE




BNC WIRE ECO

GOOD CONTRACTION
FLEXIBLE & DURABLE
THICK AND WELL STRUCTURE
EASY INSTALLATION




DC SCREW

GOOD CONTRACTION
FLEXIBLE & DURABLE
THICK AND WELL STRUCTURE
EASY INSTALLATION



DC WIRE ECO

GOOD CONTRACTION
FLEXIBLE & DURABLE
THICK AND WELL STRUCTURE
EASY INSTALLATION



DC WIRE PREMIUM


GOOD CONTRACTION
FLEXIBLE & DURABLE
THICK AND WELL STRUCTURE
EASY INSTALLATION



RCA PIN CONNECTOR

CONNECTOR TYPE RCA PLUG
VARIANT MALE
COLOR WHITE
MATERIAL PLASTIC & METAL
SUPPORT AUDIO OR VIDEO SIGNAL
MOUNTING TYPE CABLE MOUNT

POWER SUPPLY MULTI MODE



16 CHANNEL POWER SUPPLY (MULTI PORT)

MODEL: S-MP 2016.
INPUT VOLTAGE: 150V-285 V
OUTPUT VOLTAGE: 12V-1A
(EACH CHANNEL)
CABLE COMPENSATION SWITCH



8 CHANNEL POWER SUPPLY (MULTI PORT)

MODEL: S-MP2008
INPUT VOLTAGE: 150V-285 V
OUTPUT VOLTAGE: 12V-1A
(EACH CHANNEL)
CABLE COMPENSATION SWITCH



4 CHANNEL POWER SUPPLY (MULTI PORT)

MODEL: S-MP2004
INPUT VOLTAGE: 150V-285 V
OUTPUT VOLTAGE: 12V-1A
(EACH CHANNEL)
CABLE COMPENSATION SWITCH

USP & COMMON FEATURES

- INDIVIDUAL 'CIRCUIT STATUS LED' FOR EACH OUTPUT
- INDIVIDUAL PROTECTED RESETTABLE FUSE
- OUTPUT LOAD CAPACITY - 24 LED IR CAMERA PER OUTPUT.
- OVERLOAD CUTOFF & RECOVERY
- SHORT CIRCUIT PROTECTION
- OVER & UNDER VOLTAGE PROTECTION
- THERMAL SHUTDOWN PROTECTION & RECOVERY
- LOW RIPPLE VOLTAGE FOR SURVEILLANCE APPLICATION.
- HIGH EFFICIENCY & LOW ENERGY CONSUMPTION.
- HIGH GRADE PVC CASING FOR LONG DURABILITY

UNCONDITIONAL WARRANTY*

- *PHYSICAL DAMAGE WILL NOT BE CONSIDERED FOR WARRANTY CLAIM.

SINGLE MODE



16 CHANNEL POWER SUPPLY (SINGLE PORT)

MODEL: S-SP 2016
INPUT VOLTAGE: 150V -300V AC
OUTPUT VOLTAGE: 12V -16 A DC



8 CHANNEL POWER SUPPLY (SINGLE PORT)

MODEL: S-SP 2008
INPUT VOLTAGE: 150 V -300 V AC
OUTPUT VOLTAGE: 12V-8A DC



4 CHANNEL POWER SUPPLY (SINGLE PORT)


MODEL: S-SP 1004
INPUT VOLTAGE: 1500V - 3000V
OUTPUT VOLTAGE: 12V-4A

USP & COMMON FEATURES

- POWER DISTRIBUTION AS PER CAMERA NEED
- OVERLOAD CUT OFF & RECOVERY.
- SHORT CIRCUIT & OVERLOAD VOLTAGE SHUTDOWN PROTECTION.
- INPUT OVER & UNDER VOLTAGE PROTECTION.
- THERMAL SHUTDOWN PROTECTION & RECOVERY.
- TABLE TOP MODEL WITH 2PIN INPUT CORD.
- POWER ON LED INDICATION.
- INSTALLATION FRIENDLY OPEN WIRE OUTPUT
- LONG DISTANCE OUTPUT
- HIGH EFFICIENCY & LOW ENERGY CONSUMPTION

UNCONDITIONAL WARRANTY*

- *PHYSICAL DAMAGE WILL NOT BE CONSIDERED FOR WARRANTY CLAIM.

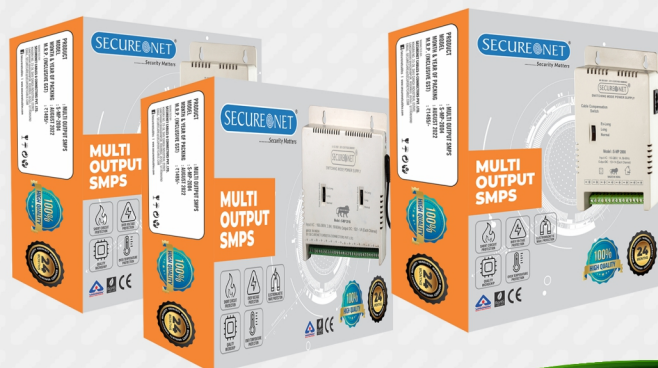

Making in India... ही नहीं... Making India Too

POWER ADAPTER



12V- 1.5 AMP ADAPTER

OVERLOAD CUT OFF & RECOVERY.
SHORT CIRCUIT PROTECTION.
OVERLOAD VOLTAGE SHUTDOWN PROTECTION.
INPUT OVER & UNDER VOLTAGE PROTECTION.
THERMAL SHUTDOWN PROTECTION & RECOVERY.
TABLE TOP MODEL WITH 2PIN/3PIN INPUT CARD.
POWER ON LED INDICATION.
WIDE INPUT VOLTAGE 90VAC~280VAC.
OUTPUT OPEN WIRE OR MOLDED DC CONNECTOR.
HIGH EFFICIENCY & LOW ENERGY CONSUMPTION.
BIS APPROVED



12V- 2 AMP ADAPTER

OVERLOAD CUT OFF & RECOVERY.
SHORT CIRCUIT PROTECTION.
OVERLOAD VOLTAGE SHUTDOWN PROTECTION.
INPUT OVER & UNDER VOLTAGE PROTECTION.
THERMAL SHUTDOWN PROTECTION & RECOVERY.
TABLE TOP MODEL WITH 2PIN/3PIN INPUT CARD.
POWER ON LED INDICATION.
WIDE INPUT VOLTAGE 90VAC~280VAC.
OUTPUT OPEN WIRE OR MOLDED DC CONNECTOR.
HIGH EFFICIENCY & LOW ENERGY CONSUMPTION.
BIS APPROVED



12V- 2 AMP ADAPTER

OVERLOAD CUT OFF & RECOVERY.
SHORT CIRCUIT PROTECTION.
OVERLOAD VOLTAGE SHUTDOWN PROTECTION.
INPUT OVER & UNDER VOLTAGE PROTECTION.
THERMAL SHUTDOWN PROTECTION & RECOVERY.
TABLE TOP MODEL WITH 2PIN/3PIN INPUT CARD.
POWER ON LED INDICATION.
WIDE INPUT VOLTAGE 90VAC~280VAC.
OUTPUT OPEN WIRE OR MOLDED DC CONNECTOR.
HIGH EFFICIENCY & LOW ENERGY CONSUMPTION.
BIS APPROVED



12V- 5 AMP ADAPTER

OVERLOAD CUT OFF & RECOVERY.
SHORT CIRCUIT PROTECTION.
OVERLOAD VOLTAGE SHUTDOWN PROTECTION.
INPUT OVER & UNDER VOLTAGE PROTECTION.
THERMAL SHUTDOWN PROTECTION & RECOVERY.
TABLE TOP MODEL WITH 2PIN/3PIN INPUT CARD.
POWER ON LED INDICATION.
WIDE INPUT VOLTAGE 90VAC~280VAC.
OUTPUT OPEN WIRE OR MOLDED DC CONNECTOR.
HIGH EFFICIENCY & LOW ENERGY CONSUMPTION.
BIS APPROVED

TONNER



TONER CARTRIDGE 12A

MODEL: S-CTC -2612A
• ULTRA BLACK & SHARP PRINT OUT
• MULTI-LAYER PROTECTION PACKAGING
• PREMIUM QUALITY



TONER CARTRIDGE 436A

MODEL: S-CTC-436A
• ULTRA BLACK & SHARP PRINT OUT
• MULTI-LAYER PROTECTION PACKAGING
• PREMIUM QUALITY



TONER CARTRIDGE 88A

MODEL: S-CTC - 388A
• ULTRA BLACK & SHARP PRINT OUT
• MULTI-LAYER PROTECTION PACKAGING
• PREMIUM QUALITY



TONER CARTRIDGE 925/35A


MODEL: S-CTC-925/35A
• ULTRA BLACK & SHARP PRINT OUT
• MULTI-LAYER PROTECTION PACKAGING
• PREMIUM QUALITY

RACKS



2U WALL MOUNT ECO PREMIUM RACK

ECO PREMIUM DVR/ NETWORKING STORAGE & SAFETY RACK
MODEL- S-R 220 ECO PREMIUM
SIZE-HEIGHT -140 MM, WIDTH-400-DEPTH -350 MM
FRONT - 0.3 MM ACRYLIC TRANSPARENT SHEET (310 MM X 90 MM) DOOR WITH LOCK
PDU- 3 SOCKET POWER DISTRIBUTION UNIT INSTALLED
CONSTRUCTION- WELDED
FRAME- .6 MM STEEL MS SHEET



2U WALL MOUNT RACK

PREMIUM DVR/ NETWORKING STORAGE & SAFETY FOLDING RACK
MODEL- S-FR-2U
SIZE-HEIGHT -140 MM, WIDTH-450-DEPTH -350 MM
FRONT - 0.5 MM TOUGHENED GLASS (330 MM X 90 MM) DOOR WITH LOCK
PDU- 3 SOCKET POWER DISTRIBUTION UNIT INSTALLED
CONSTRUCTION- CKD -FOLDING
FRAME- .8 MM STEEL MS SHEET



2U WALL MOUNT RACK

PREMIUM DVR/ NETWORKING STORAGE & SFETY RACK
MODEL- S-R 2U
SIZE-HEIGHT -140 MM, WIDTH-450-DEPTH -350 MM
FRONT - 0.5 MM TOUGHEND GLASS (330 MM X 90 MM) DOOR WITH LOCK
PDU- 3 SOCKET POWER DISTRIBUTION UNIT INSTALLED
CONSTRUCTION- WELDED
FRAME- .8 MM STEEL MS SHEET .




4U WALL MOUNT RACK

PREMIUM DVR/ NETWORKING STORAGE & SAFETY RACK
MODEL- S-R 4U
SIZE- HEIGH -230 MM, WIDTH - 500 MM, DEPTH -400MM
FRONT 0.5 MM TOUGHENED GLASS DOOR WITH LOCK
PDU- 3 SOCKET POWER DISTRIBUTION UNIT INSTALLED
SELF TRAY - 1U FIXED TRAY INSTALLED .
CONSTRUCTION - WELDED
FRAME - 1.0 MM STEEL MS SHEET
COOLING FAN - 1 FAN ON TOP OF RACK INSTALLED



6U WALL MOUNT RACK

PREMIUM DVR / NETWORKING STORAGE & SAFETY RACK
MODEL- S-R 6U
SIZE: HEIGHT: 350MM, WIDTH: 500MM, DEPTH: 400MM
FRONT 0.5 MM TOUGHENED GLASS (400 MM X 220 MM) DOOR WITH LOCK
PDU: 4 SOCKET POWER DISTRIBUTION UNIT INSTALLED
CONSTRUCTION: WELDED
FRAME: 19" X 1.5 MM ANGEL AND STEEL 1.2 MM MS SHEET
SELF TRAY: 1U CANTILEVER TRAY (ADJUSTABLE)
COOLING FAN: 1 FAN INSTALLED & PROVISION FOR 1 MORE .



9U WALL MOUNT RACK

PREMIUM DVR/ NETWORKING STORAGE & SAFETY RACK
MODEL- S-R 9U
SIZE: HEIGHT: 450 MM, WIDTH: 550 MM, DEPTH: 400 MM
FRONT 0.5 MM TOUGHENED GLASS (400 MM X 330 MM) DOOR WITH LOCK
PDU: 6 SOCKET POWER DISTRIBUTION UNIT INSTALLED
CONCRETION: WELDED
FRAME: 19" X 1.5 MM ANGEL & STEEL 1.2 MM MS SHEET
SELF TRAY: 1U CANTILEVER TRAY (ADJUSTABLE)
COOLING FAN: 1 FAN INSTALLED AND PROVISION FOR 1 MORE.



USP

- BIGGEST GLASS DOOR FOR PROPER VISIBILITY OF DEVICES
- FULLY LOADED
- FOLLOWING WORLD STANDARD

COMMON FEATURES / ACCESSORIES

- CABLE ENTRY ON TOP AND BOTTOM
- VENTILATION SLOT ON DOOR AND SIDE PANEL
- COLOR: ROYAL BLUE & PEARL WHITE
- FINISH: POWDER COATED
- SUPPLIED WITH WALL MOUNT HARDWARE.

OPTIONAL ACCESSORIES

- 19" RACK MOUNT 1U PVC CABLE MANGER FOR 6U AND ABOVE RACK.
- TRAY
- FAN

DVR ENCLOSURE



DVR ENCLOSURE

SUITABLE FOR 4CH/8CH/16CH DVR/NVR
PVC ENCLOSURE WITH RUBBER GRIP AND LOCK WITH UNIVERSAL POWER SOCKETS FOR EASY CONNECTIVITY
KEY LOCK FOR BETTER CLOSING AND PROTECTION.
HARDWARE: SCREW AND FASTENER FOR RACK MOUNTING INCLUDED
SIZE: 14 H X 11 W X 5 L
MADE FROM ABS HIGH IMPACT & HEAT RESISTANT POLYMER



Making in India... ही नहीं... Making India Too

ACCESSORIES

SECURENET
.....Security Matters



AUDIO DOME

MODEL: S-AU20
PRODUCT: SURVEILLANCE MICROPHONE
FREQUENCY RESPONSE: 100-20 KHZ
OUTPUT LEVEL: 0-2.5PP
MONITOR AREA: 5-20M



CRIMPING TOOL

TERMINATES 4-WIRE RJ11, 6-WIRE RJ12 & 8-WIRE RJ 45 MODULAR PLUGS
STRIPS FLAT MODULAR AND ROUND NETWORK CABLE, SUCH AS CAT 5E AND CAT 6
SINGLE BLADE CUTS CABLES CLEANLY
STURDY CONSTRUCTION DESIGNED TO LAST A LONG TIME
EASY-GRIP HANDLE FEELS COMFORTABLE IN YOUR HAND



RJ45

FAST TRANSMISSION
STRONG TOUGHNESS
INTERNET IS NOT DROPPED
SHIELDING ANTI-JAMMING
INTERNATIONAL DESIGN & PRODUCTION
PASS FLUEK TEST
OPTIMAL PERFORMANCE
EASILY IDENTIFY WIRING ORDER
SUPERB COMPATIBILITY

PACK OF 100 / PACK OF 50



PVC JUNCTION BOX

CCTV PVC JUNCTION BOX
COLOR: WHITE
ITEM WEIGHT: 60G
COMPATIBLE DEVICES: USED WITH HD & IP CCTV CAMERA
INCLUDED COMPONENTS: 4 SCREW

MODEL AVAILABLE
S-PJB4X4 (4.0 X 4.0)
S-PJB5X5 (5.0 X 5.0)



LAPTOP POWER CORD CABLE

MOLDED-STRAIN RELIEF
18 AWG CONNECTORS IEC-C5 TO STANDARD
3 PIN INDIAN PLUG.




DESKTOP POWER CORD CABLE

MOLDED-STRAIN RELIEF
18 AWG CONNECTORS IEC-C5 TO STANDARD
3 PIN INDIAN PLUG



VIDEO BALUN (2MP)

PRODUCT: SINGLE PORT VIDEO BALUN 2.0 MP
MODEL: S-VB 2.0
FEATURES: COMPATIBLE WITH AHD/CVI/TVI SIGNAL
TRANSMISSION SIGNAL: 720P/1080P/1080P/4K
CABLE: CAT 5/5E/6
TRANSMISSION DISTANCE TO 300M FOR CVI/AHD, 200M FOR TVI
NO POWER REQUIRED
BUILT IN SURGE & TRANSIENT PROTECTION
SUPER INTERFERENCE REJECTION.



VIDEO BALUN (5MP)

PRODUCT: SINGLE PORT VIDEO BALUN 5.0 MP
MODEL: S-VB 5.0
PRODUCT DETAILS OF 2PCS 5MP HD-CVI/TVI/AHD 400M
CCTV PASSIVE VIDEO BALUN:
TRANSMISSION SIGNAL: 1 CHANNEL
TRANSMISSION DISTANCE: AHD/CVI 400M (MAX), TVI 200M (MAX)
CATEGORY TYPE: UTP CAT5/5E/6.
COAXIAL VIDEO CONNECTOR: BNC-M.
TWISTED PAIR VIDEO CONNECTOR: PUSH TERMINAL.
COMPATIBLE FORMAT: AHD/HDCVI/HD-TVI/CVBS.



VIDEO BALUN (8MP)

PRODUCT: SINGLE PORT VIDEO BALUN 8.0 MP
MODEL: S-VB 8.0
QUANTITY 4 PAIRS
CATEGORY TYPE UTP CAT 5/5E/6
RESOLUTION 720P/960P/1080P/3MP/4MP/8MP
COMPATIBLE FORMAT AHD/HDCVI/HD-TVI/CVBS
1080P VIDEO BALUN TRANSCEIVER CABLE
4 PAIRS
CAT 5E/6
720P/1080P
HD-CVI/HD-TVI/HD-AHD/CVBS

Making in India... ही नहीं... Making India Too

TELEPHONE CABLE

SECURENET
.....Security Matters



S-T 450

CABLE TYPE: 2 PAIR TELEPHONE CABLE
CORE CONDUCTORS: 45 MM TINNED COPPER
100% TINNED COPPER
CABLE LENGTH: 90 M
PACKING: RETAIL PACK



S-T 2450300

CABLE TYPE: 2 PAIR TELEPHONE CABLE
CABLE LENGTH: 300 M
PACKING: WOODEN REEL



S-T 2450500

CABLE TYPE: 2 PAIR TELEPHONE CABLE
PACKING: WOODEN REEL



S-T 5450300

CABLE TYPE: 5-PAIR TELEPHONE CABLE
CABLE LENGTH: 300 M
PACKING: WOODEN REEL



S-T5 450500

CABLE TYPE: 5-PAIR TELEPHONE CABLE
CABLE LENGTH: 500 M
PACKING: WOODEN REEL



S-T10450300

CABLE TYPE: 10 PAIR TELEPHONE CABLE
CABLE LENGTH: 300 METER
PACKING: WOODEN REEL



S-T10450500

CABLE TYPE: 10 PAIR TELEPHONE CABLE
CABLE LENGTH: 500 M
PACKING: WOODEN REEL

USP & COMMON FEATURES

- CORE CONDUCTORS: 45 MM
- 100% TINNED COPPER (ABC)
- 100% FR PVC INSULATION ON ALL CORES
- OUTER SEATH INSULATION FR PVC
- ALL CORES ARE HDPE INSULATED
- OUTER SHEATH: FR PVC

Making in India... ही नहीं... Making India Too

INTERCOM

SECURENET
.....Security Matters



INTERCOM 2 LINE HOTLINE

2 LINE INTERCOMS (HOTLINE)
MODEL: S-IC02
CAPACITY: 2 LINE INTERCOM SYSTEM
COST EFFECTIVE DESIGN, NO INSTALLATION REQUIRED
CALL PICK-UP FROM ANY EXTENSION.
CALL TRANSFER, CALL HOLD & BUSY TRANSFER
PLUG AND PLAY



INTERCOM 4 LINE

PRODUCT: 4 LINE INTERCOM
MODEL: S-IC04
CAPACITY: 2 LINE INTERCOM SYSTEM
COST EFFECTIVE DESIGN, NO INSTALLATION REQUIRED
CALL PICK-UP FROM ANY EXTENSION.
CALL TRANSFER, CALL HOLD & BUSY TRANSFER
PLUG AND PLAY

EPABX



EPABX 1+4 LINE

PRODUCT INFORMATION: 1 LINE IN & 4 LINE OUT
MODEL 1 LINE IN & 4 LINE OUT
ITEM MODEL NUMBER S-EB 104
SPECIAL FEATURES: NON CALLER ID, BASIC
ANALOGUE, JUMPER BASED PROGRAMMING



EPABX 1+8 LINE

PRODUCT: 1 LINE IN & 8 LINES OUT
MODEL S-EB 108



EPABX 1+15 LINE

SPECIAL FEATURES: PARKING,
CALL FORWARDING, ALLOW / CANCEL LOCAL
/ STD DIALING, FSK / DTMF, CALLER ID,
CALL MONITORING/CALL BARGE-IN,
DO NOT DISTURB MODE,
CONFERENCE CALLING,
CORDLESS PHONE SUPPORT,
TRUNK CALL PICKUP



EPABX 1+23 LINE

CALL TRANSFER: YES
CALL RECORDING: NO
AUTOMATIC REDIAL: NO
CONFERENCE CALLS: YES
WARRANTY: COVERED IN WARRANTY EPABX
NOT COVERED IN WARRANTY: WIRE
WARRANTY SERVICE TYPE: MANUFACTURER
MORE DETAILS: GENERIC NAME,
LANDLINE PHONES



EPABX 1+31 LINE

CALL TRANSFER: YES
CALL RECORDING: NO
AUTOMATIC REDIAL: NO
CONFERENCE CALLS: YES
WARRANTY: COVERED IN WARRANTY EPABX
NOT COVERED IN WARRANTY: WIRE
WARRANTY SERVICE TYPE: MANUFACTURER
MORE DETAILS: GENERIC NAME,
LANDLINE PHONES



EPABX 1+39 LINE

CALL TRANSFER: YES
CALL RECORDING: NO
AUTOMATIC REDIAL: NO
CONFERENCE CALLS: YES
WARRANTY: COVERED IN WARRANTY EPABX
NOT COVERED IN WARRANTY: WIRE
WARRANTY SERVICE TYPE: MANUFACTURER
MORE DETAILS: GENERIC NAME,
LANDLINE PHONES



EPABX 1+47 LINE

CALL TRANSFER: YES
CALL RECORDING: NO
AUTOMATIC REDIAL: NO
CONFERENCE CALLS: YES
WARRANTY: COVERED IN WARRANTY EPABX
NOT COVERED IN WARRANTY: WIRE
WARRANTY SERVICE TYPE: MANUFACTURER
MORE DETAILS: GENERIC NAME,
LANDLINE PHONES



EPABX 1+55 LINE

CALL TRANSFER: YES
CALL RECORDING: NO
AUTOMATIC REDIAL: NO
CONFERENCE CALLS: YES
WARRANTY: COVERED IN WARRANTY EPABX
NOT COVERED IN WARRANTY: WIRE
WARRANTY SERVICE TYPE: MANUFACTURER
MORE DETAILS: GENERIC NAME,
LANDLINE PHONES

Making in India... ही नहीं... Making India Too

DDR III RAM (LAPTOP)



**DDR III - 4GB
S-LR3-1333-4GB**



**DDR III - 8GB
S-LR3-1333-8GB**



**DDR III - 4GB
S-LR3-1600-4GB**



**DDR III - 8GB
S-LR3-1600-8GB**

DDR IV RAM (LAPTOP)



**DDR IV - 4GB
S-LR4-2666-4GB**



**DDR IV - 8GB
S-LR4-2666-8GB**



**DDR IV - 16GB
S-LR4-2666-16GB**



**DDR IV - 32GB
S-LR4-2666-32GB**

DDR III RAM (DESKTOP)



**DDR III - 2GB
S-DR3-1333-2GB**



**DDR III - 4GB
S-DR3-1333-4GB**



**DDR III - 8GB
S-DR3-1333-8GB**



**DDR III - 2GB
S-DR3-1600-2GB**



**DDR III - 4GB
S-DR3-1600-4GB**



**DDR III - 8GB
S-DR3-1600-8GB**

DDR IV RAM (DESKTOP)



**DDR IV - 4GB
S-DR4-2666-4GB**



**DDR IV - 8GB
S-DR4-2666-8GB**



**DDR IV - 16GB
S-DR4-2666-16GB**



**DDR IV - 32GB
S-DR4-2666-32GB**



**DDR IV - 4GB
S-DR4-3200-4GB**




**DDR IV - 8GB
S-DR4-3200-8GB**



**DDR IV - 16GB
S-DR4-3200-16GB**

NVMe SSD



128 GB NVMe SSD

MODEL - S-NVM 128
CAPACITY: 128GB
INTERFACE : NVME PCIe SSD
READ & WRITE SPEED : 2100MB/S
PCIe TRANSMISSION CHANNEL
NVMe 1.3 NEW PROTOCOL
STORAGE TEMPERATURE: 40°C~85°C
WORKING TEMPERATURE : 0°C~70°C
SIZE : 80MMX22MMX2MM
WEIGHT: < 7G
3 YEARS UNCONDITIONAL WARRANTY*



256 GB NVMe SSD

MODEL - S-NVM 256
CAPACITY: 256GB
INTERFACE : NVME PCIe SSD
READ & WRITE SPEED : 2100MB/S
PCIe TRANSMISSION CHANNEL
NVMe 1.3 NEW PROTOCOL
STORAGE TEMPERATURE: 40°C~85°C
WORKING TEMPERATURE : 0°C~70°C
SIZE : 80MMX22MMX2MM
WEIGHT: < 7G
3 YEARS UNCONDITIONAL WARRANTY*



512 GB NVMe SSD

MODEL - S-NVM 512
CAPACITY: 512GB
INTERFACE : NVME PCIe SSD
READ & WRITE SPEED : 2100MB/S
PCIe TRANSMISSION CHANNEL
NVMe 1.3 NEW PROTOCOL
STORAGE TEMPERATURE: 40°C~85°C
WORKING TEMPERATURE : 0°C~70°C
SIZE : 80MMX22MMX2MM
WEIGHT: < 7G
3 YEARS UNCONDITIONAL WARRANTY*



1TB NVMe SSD

MODEL - S-NVM 1TB
CAPACITY: 1TB
INTERFACE : NVME PCIe SSD
READ & WRITE SPEED : 2100MB/S
PCIe TRANSMISSION CHANNEL
NVMe 1.3 NEW PROTOCOL
STORAGE TEMPERATURE: 40°C~85°C
WORKING TEMPERATURE : 0°C~70°C
SIZE : 80MMX22MMX2MM
WEIGHT: < 7G
3 YEARS UNCONDITIONAL WARRANTY*

SATA SSD



128 GB SATA SSD

MODEL: S-SA 128
INTERFACE : SATA III
READING SPEED : 550MBPS
WRITING SPEED : 450 MBPS
STORAGE TEMPERATURE: 40°C~85°C
WORKING TEMPERATURE : 0°C~70°C
SIZE : 100MM X 70MM X6.7MM
WEIGHT: < 56G
UNCONDITIONAL WARRANTY: 3 YEARS



256 GB SATA SSD

MODE: S-SA 256
INTERFACE : SATA III
READING SPEED : 550MBPS
WRITING SPEED : 450 MBPS
STORAGE TEMPERATURE: 40°C~85°C
WORKING TEMPERATURE : 0°C~70°C
SIZE : 100MMX70MMX6.7MM
WEIGHT: < 56G
UNCONDITIONAL WARRANTY: 3 YEARS



512 GB SATA SSD

MODE: S-SA 512
INTERFACE : SATA III
READING SPEED : 550MBPS
WRITING SPEED : 450 MBPS
STORAGE TEMPERATURE: 40°C~85°C
WORKING TEMPERATURE : 0°C~70°C
SIZE : 100MMX70MMX6.7MM
WEIGHT: < 56G
UNCONDITIONAL WARRANTY: 3 YEARS



1 TB SATA SSD

MODE: S-SA 1TB
INTERFACE : SATA III
READING SPEED : 550MBPS
WRITING SPEED : 450 MBPS
STORAGE TEMPERATURE: 40°C~85°C
WORKING TEMPERATURE : 0°C~70°C
SIZE : 100MMX70MMX6.7MM
WEIGHT: < 56G
UNCONDITIONAL WARRANTY: 3 YEARS

USP

- UNCONDITIONAL WARRANTY*
- WORKING IN HIGHER TEMPERATURE SEAMLESSLY.
- LOWER POWER CONSUMPTION
- FASTER SPEED
- HAVING ALL MAJOR CERTIFICATION

NOTE

- FOLLOWING WORLD STANDARD
- FOLLOWING CONSTANT QC.
- PHYSICAL DAMAGE WILL NOT BE CONSIDERED FOR WARRANTY CLAIM

Making in India... ही नहीं... Making India Too

Committed for Safe and Secure New India...



ISO
9001:2015



.....Security Matters

Securenet Cables & Connectors Private Limited

HEAD OFFICE

22-A/5, COOPER ROAD,
CIVIL LINES,
PRAYAGRAJ 211001 (U.P.)

WEBSITE

WWW.SECURENETCABLES.COM

FOLLOW US



BRANCH OFFICE

STREET NO. 3, PLOT NO.59,
BLOCK-1, VISHVAS NAGAR,
SHAHNARA, DELHI 110032

FACTORY

KHASRA NO. 23-24,
SHIV GANGA INDUSTRIAL ESTATE,
LAKESHWARI BHAGWANPUR,
ROORKEE 247661, UTTARAKHAND

DELHI SALES OFFICE

206, SIDDHARTHA BUILDING, 96
NEHRU PLACE, DELHI 110019

SALES

9415214632, 7309030979, 9795519551

SALES EMAIL

MARKETING@SECURENETCABLES.COM
EBUSINESS@SECURENETCABLES.COM



SERVICE SUPPORT

CALL +91-8739005610 OR EMAIL AT US
SECURECARE@SECURENETCABLES.COM